

# MDG31PN

MAYTAG® COMMERCIAL  
ENERGY ADVANTAGE™  
ON-PREMISES DRYING TUMBLER



## LEGENDARY MAYTAG DEPENDABILITY

Maximizing your equipment investment for over a half century.



## MICROPROCESSOR CONTROLS

Advanced computer controls let you program drying cycles with desired drying times, temperatures and cool-down. Then select the cycle with the simple touch of a button.

## MORE ENERGY-SAVING SOLUTIONS THAN ANY OTHER BRAND

Maytag built the first appliance ever to receive the ENERGY STAR® label. Today we offer more high-efficiency laundry appliances than any other brand—from energy-efficient dryers to highly efficient ENERGY STAR®-qualified washers—to help you save money and build profits.

## FOR YOUR OPERATION:

- Auto Cycle Helps Prevent Laundry Overheating
- Fast-Drying Axial Airflow System
- Extra-Large Door Opening
- Digital Display Shows Time Remaining In Cycle
- Extra-Large Lint Compartment
- Factory-Installed Risers

## BUILT-TO-LAST™ FEATURES:

- S.A.F.E. System Puts Out Dryer Fires
- Heavy-Duty Motor

LAUNDRY SOLUTIONS  
YOU CAN *DEPEND* ON.

MAYTAG'S MOST EFFICIENT  
MULTI-LOAD DRYER

visit [maytagcommerciallaundry.com](http://maytagcommerciallaundry.com)  
or call 800-662-3587



## OUR COMMITMENT TO DEPENDABLE QUALITY

At Maytag, we believe durable goods should remain just that. That's why every Maytag® product is constructed of the highest-quality materials and with the utmost in precision craftsmanship. It's also why we stand behind our equipment with solid service and support from our professional Maytag laundry suppliers. Simply put, when you choose Maytag® products, you ensure your peace of mind.



## MDG31PN

MAYTAG® COMMERCIAL ENERGY ADVANTAGE™ ON-PREMISES DRYING TUMBLER


## Maytag® Commercial Energy Advantage™ On-Premises Drying Tumbler

### MICROPROCESSOR CONTROL

DRYER SPECIFICATIONS	
<b>MODEL</b>	<b>MDG31PN</b>
<b>CAPACITY</b>	
Lbs. (kg)	30 (13.6)
Cu. ft. (liters)	11.04 (312)
Tumbler diameter—in. (mm)	30 (762)
Tumbler depth—in. (mm)	27 (686)
<b>MOTOR</b>	
HP (kw) tumbler/blower	.25 (.18)/.50 (37)
Tumble speed—rpm	40 ± 1.5
<b>AIRFLOW</b>	
Cfm (cmm)	360 (10.2)
<b>HEAT INPUT</b>	
BTU/hr. (kcal/hr.)	55,000 (13,860)
<b>GAS INLET</b>	
In. M.N.P.T.—in. (mm)	1 inlet, 3/8 (9.65)
<b>VOLTAGE/BREAKER/FUSE REQUIREMENTS</b>	
Voltage (Hz)/Phase	120 (60)/1
Amps	15
<b>COLOR</b>	
White	Yes
<b>APPROXIMATE WEIGHT</b>	
Crated—lbs. (kg)	310 (140.6)
Uncrated—lbs. (kg)	285 (129.3)
<b>DIMENSIONS</b>	
A) Height—in. (mm)	44.7 (1137)
B) Width—in. (mm)	31.12 (791)
C) Depth not including door handle—in. (mm)	34.50 (876)
D) Exhaust duct diameter—in. (mm)	6 (152)*
E) Riser height—in. (mm)	22 (559)**
Door opening—in. (mm)	19.38 (492)

\* Requires 8" (203 mm) material if venting horizontally; 10" (254 mm) if venting vertically.  
 \*\* Shipped with two 11" risers.

See specific instructions for proper installation. Because of continuous product improvement, Maytag reserves the right to change specifications without notice.

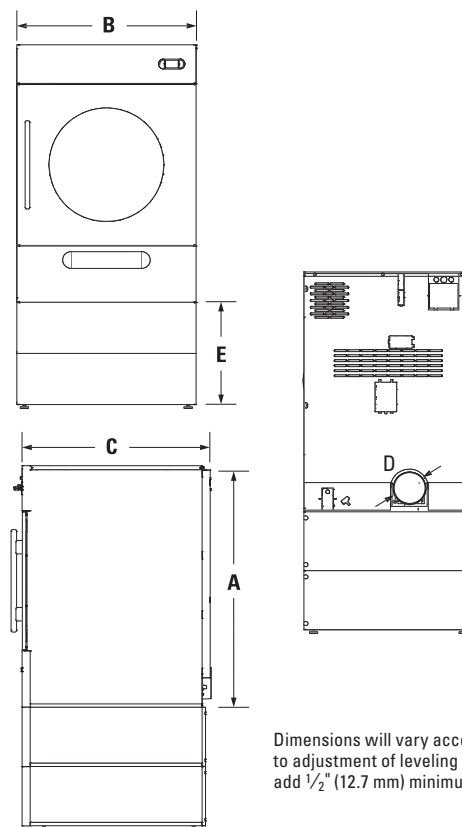

Dimensions will vary according to adjustment of leveling legs; add 1/2" (12.7 mm) minimum.



NEW YORK CITY M.E.A.



### MAYTAG® LIMITED WARRANTY 3 YEARS—ALL PARTS

For a period from the date of original purchase through the time listed above, the designated parts that fail in normal commercial use will be repaired or replaced free of charge for the part itself, with the owner paying all other costs, including labor, transportation and customs duty. Chemical damage is excluded from all warranty coverage. See complete warranty for details.