

MDG51PN

MAYTAG® COMMERCIAL
ENERGY ADVANTAGE™
ON-PREMISES DRYING TUMBLER



LEGENDARY MAYTAG DEPENDABILITY

Maximizing your equipment investment for over a half century.



MICROPROCESSOR CONTROLS

Advanced computer controls let you program drying cycles with desired drying times, temperatures and cool-down. Then select the cycle with the simple touch of a button.

MORE ENERGY-SAVING SOLUTIONS THAN ANY OTHER BRAND

Maytag built the first appliance ever to receive the ENERGY STAR® label. Today we offer more high-efficiency laundry appliances than any other brand—from energy-efficient dryers to highly efficient ENERGY STAR®-qualified washers—to help you save money and build profits.

FOR YOUR OPERATION:

- Auto Cycle Helps Prevent Laundry Overheating
- Fast-Drying Axial Airflow System
- Extra-Large Door Opening
- Digital Display Shows Time Remaining In Cycle
- Extra-Large Lint Compartment
- Available in 50-Pound Capacity
- Reverse Tumbler Feature Reduces Twisting
- Factory-Installed Risers

BUILT-TO-LAST™ FEATURES:

- Reversing Dryers With 120-Volt Service
- S.A.F.E. System Puts Out Dryer Fires
- Heavy-Duty Motor



LAUNDRY SOLUTIONS
YOU CAN *DEPEND* ON.

MAYTAG'S MOST EFFICIENT
MULTI-LOAD DRYER

visit maytagcommerciallaundry.com
or call 800-662-3587



OUR COMMITMENT TO DEPENDABLE QUALITY

At Maytag, we believe durable goods should remain just that. That's why every Maytag® product is constructed of the highest-quality materials and with the utmost in precision craftsmanship. It's also why we stand behind our equipment with solid service and support from our professional Maytag laundry suppliers. Simply put, when you choose Maytag® products, you ensure your peace of mind.



MDG51PN

MAYTAG® COMMERCIAL ENERGY ADVANTAGE™ ON-PREMISES DRYING TUMBLER

Maytag® Commercial Energy Advantage™ On-Premises Drying Tumbler

MICROPROCESSOR CONTROL


Available in 50-pound capacity

DRYER SPECIFICATIONS	
MODEL	MDG51PN
CAPACITY	
Lbs. (kg)	50 (22.7)
Cu. ft. (liters)	16.02 (454)
Tumbler diameter — in. (mm)	37 (939.8)
Tumbler depth — in. (mm)	25.75 (654.1)
MOTOR	
HP (kw) Drive Motor/Tumbler	1 (.746)/.50 (37) Reversible
Tumble speed — rpm	40 ± 1.5
AIRFLOW	
Cfm (cmm)	525 (14.87)
HEAT INPUT	
BTU/hr. (kcal/hr.)	90,000 (22,680)
GAS INLET	
In. M.N.P.T. — in. (mm)	1 inlet, 1/2 (12.7)
VOLTAGE/BREAKER/FUSE REQUIREMENTS	
Voltage	120
Amps	20
COLOR	
White	Yes
APPROXIMATE WEIGHT	
Crated — lbs. (kg)	565 (256)
Uncrated — lbs. (kg)	545 (247)
DIMENSIONS	
A) Height not including legs — in. (mm)	55.5 (1409)
B) Width — in. (mm)	38.25 (975)
C) Depth not including door handle — in. (mm)	39.25 (997)
D) Exhaust diameter — in. (mm)	8 (203)*
E) Riser Height — in. (mm)	22 (559)**
Door opening — in. (mm)	27.38 (695)

* Requires 8" (203 mm) material if venting horizontally; 10" (254 mm) if venting vertically.

** Shipped with two 11" risers.

See specific instructions for proper installation. Because of continuous product improvement, Maytag reserves the right to change specifications without notice.

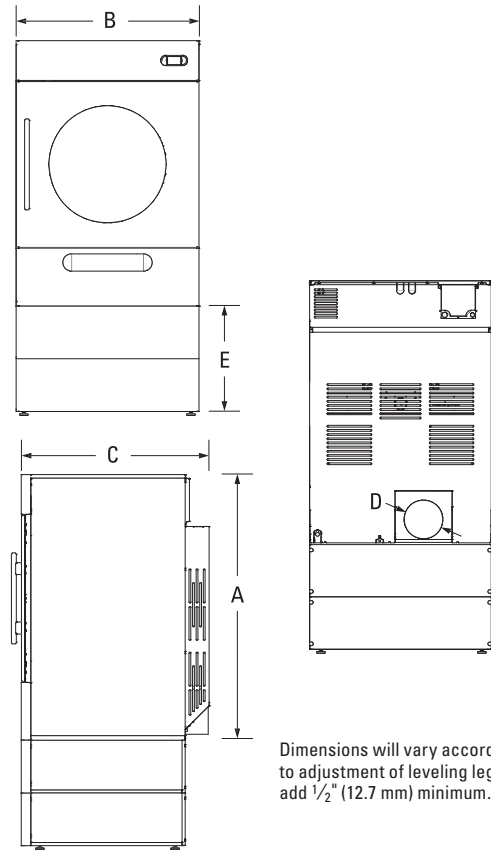

Dimensions will vary according to adjustment of leveling legs; add 1/2" (12.7 mm) minimum.



MAYTAG® LIMITED WARRANTY 3 YEARS – ALL PARTS

For a period from the date of original purchase through the time listed above, the designated parts that fail in normal commercial use will be repaired or replaced free of charge for the part itself, with the owner paying all other costs, including labor, transportation and customs duty. Chemical damage is excluded from all warranty coverage. See complete warranty for details.