



NATIONAL COMBUSTION CO., INC.

WALL-NAT

WALL HUNG, DIRECT VENT WATER HEATERS

*USING WALL-NAT INSTEAD OF CONVENTIONAL WATER HEATERS
OPENS SPACE FOR INCOME PRODUCING WASHERS AND DRYERS*



NO BOILER ROOM

NO CHIMNEY

*NO LARGE FRESH
AIR OPENINGS*

*THESE FEATURES
CAN SAVE YOU
THOUSANDS
IN CONSTRUCTION
COSTS*

Heater can be installed with a pump and a storage tank

WALL-NAT FEATURES

MODEL	Input BTU	Efficiency	Width (W)	Dimensions Depth (D)	Height (H)	Water Conn In / Out	Gas Conn	Air/Exhaust Conn	Weight
WN199-I	199,000	82-85%	14"	10"	26"	3/4"	3/4"	5"	50 lbs.
WN199-O	199,000	82%	14"	10"	25"	3/4"	3/4"	n/a	46 lbs.


INDOOR

- Natural Gas or Propane.
- Direct Vent (no chimney).
- Sealed Combustion (no fresh air opening) uses concentric vent which combines makeup air and exhaust into 5" pipe.
- No Boiler Room Required.
- 5 Year Warranty On All Parts.

CAN BE INSTALLED BEHIND DRYER AREA

REMOTE CONTROL


- Digital Display
- Diagnostic Display
- Simple Temp. Setting

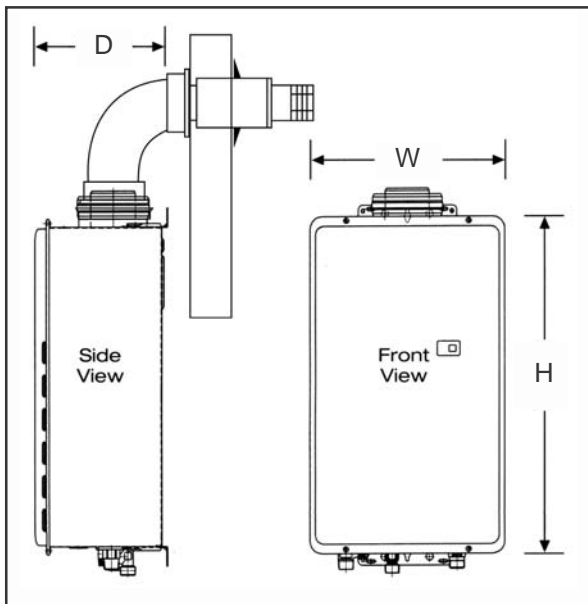

OUTDOOR

- Natural Gas or Propane.
- Freeze Protection Electric Heater and Auto Firing to Maintain Minimum Temperature.
- Recess Box Enclosure (optional)
- 5 Year Warranty On All Parts.

CAN BE MOUNTED ON OUTSIDE WALL OR RECESSED IN CABINET

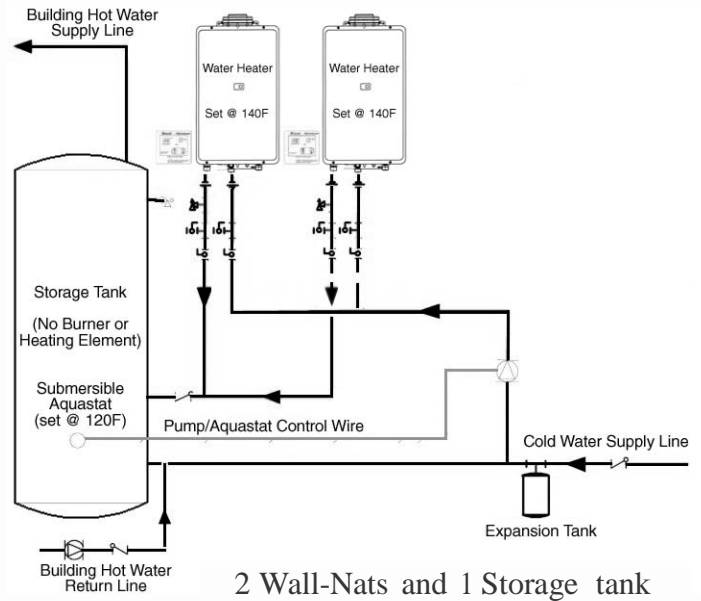

Recovery Ratings G.P.H. @ VARIOUS TEMP. RISES deg. f

Model	60	70	80	90	100	110	120
WN199-I	330	282	252	222	198	180	168
WN199-O	330	282	252	222	198	180	168

SG 7/03 2000



NATIONAL COMBUSTION CO., INC.
104-11 180TH ST., JAMAICA, NY 11433
(718) 291-8400 ♦ FAX (718) 291-6870
SALES@NATIONALCOMBUSTION.COM
WWW.NATIONALCOMBUSTION.COM

